

TYSONIC NON-SPILLABLE SEALED RECHARGEABLE BATTERY

TY1223V 12V, 2.3Ah


☆ SPECIFICATION

- NOMINAL VOLTAGE : 12 V
- NOMINAL CAPACITY (20hr) : 2.3Ah
- DIMENSIONS
 - TOTAL HEIGHT : 61 mm (2.40 inches)
 - CONTAINER HEIGHT : 61 mm (2.40 inches)
 - LENGTH : 182 mm (7.17 inches)
 - WIDTH : 23.5 mm (0.93 inches)
- WEIGHT : APPROX 0.73 Kg (1.61 lbs)
- MAX DISCHARGE CURRENT : 23 A (5 sec)
- STANDARD TERMINALS : PC-04
- CONTAINER MATERIAL : GENERAL GRADE ABS


☆ CHARACTERISTICS

- CAPACITY 25 C / 77 F
 - 20 hr @ 115mA : 2.3 Ah
 - 10 hr @ 210mA : 2.1 Ah
 - 5 hr @ 370mA : 1.84 Ah
 - 1 hr @ 1380mA : 1.40 Ah
- INTERNAL RESISTANCE() : 70 mΩ, 77 F Ω
- CHARGING VOLTAGE (25C , 77 F)
 - STANDBY USE : 2.2750.025 V/CELL
 - : (-3.3mV / C / CELL)
 - CYCLE USE : 2.450.05 V/CELL
 - : (-5 mV / C / CELL)
- MAX CHARGING CURRENT : 0.69 A


Discharge Characteristics 25 C (77 F)⁰

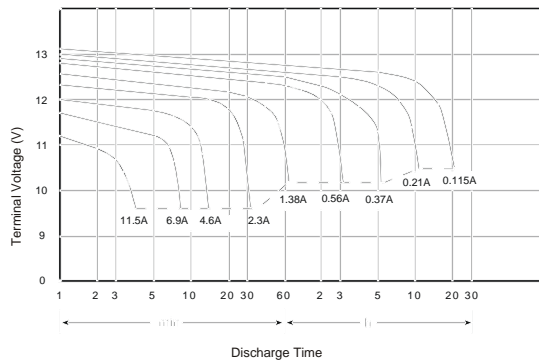

Discharge Current vs Time

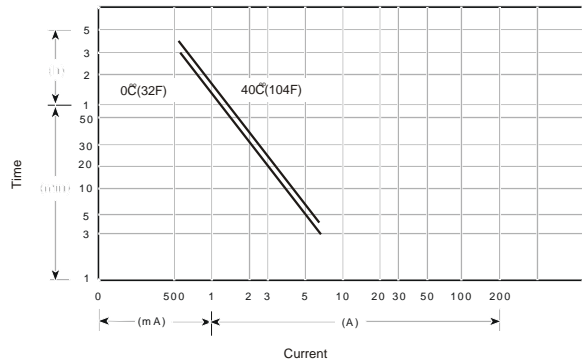

☆ Dimensions

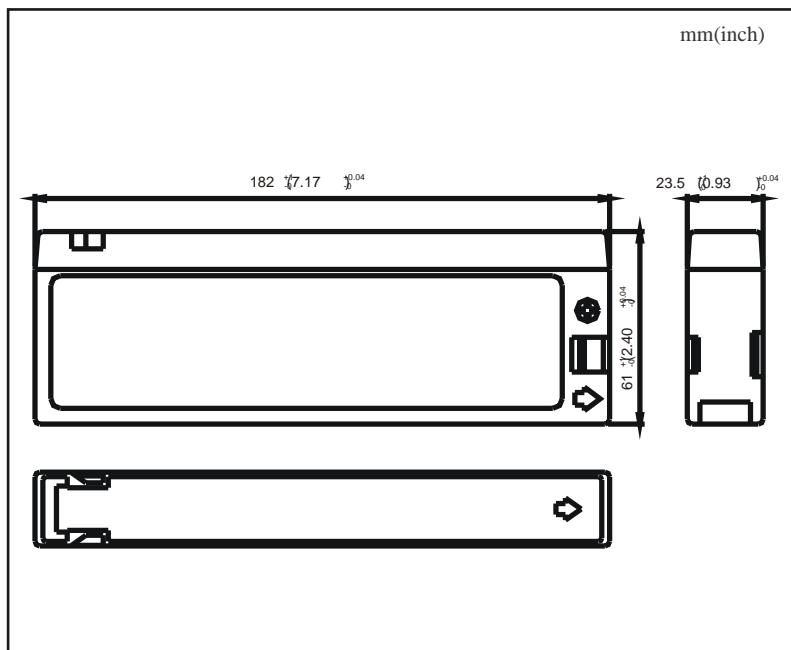

☆ Terminal

