




NON-SPILLABLE SEALED RECHARGEABLE BATTERY


TY-6-200

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 6 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 200.0 Ah	20 hr @ 10 A : 200 Ah
● DIMENSIONS	10 hr @ 18 A : 180 Ah
TOTAL HEIGHT : 259.5 mm (10.22 inches)	5 hr @ 32 A : 160 Ah
CONTAINER HEIGHT : 225.5 mm (8.88 inches)	1 hr @ 120 A : 120 Ah
LENGTH : 322 mm (12.68 inches)	1 C @ 200 A : 100 Ah
WIDTH : 178 mm (7.01 inches)	● INTERNAL RESISTANCE(25°C , 77 °F) : 4.0 mΩ
WEIGHT : APPROX 35.7 kg (78.6 lbs)	● CHARGING VOLTAGE (25°C , 77 °F)
● MAX DISCHARGE CURRENT : 1600 A (5 sec)	STANDBY USE : 2.275±0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 4000 A(0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : FP-08	CYCLE USE : 2.45±0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
	● MAX CHARGING CURRENT : 60 A


Discharge Characteristics 25 °C (77 °F)

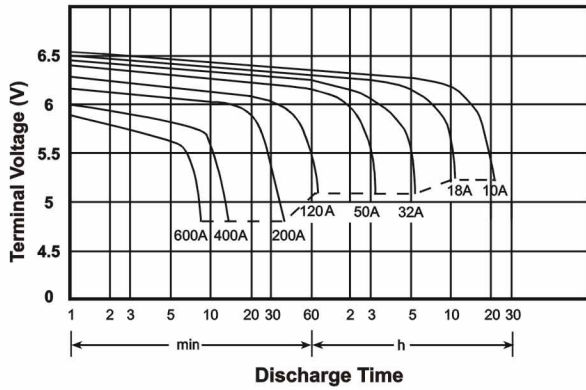

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

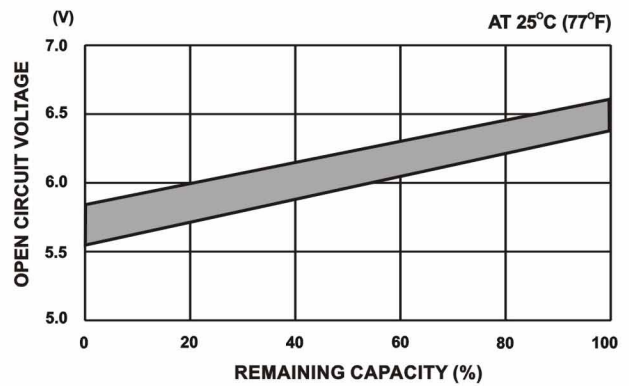

☆ Dimensions

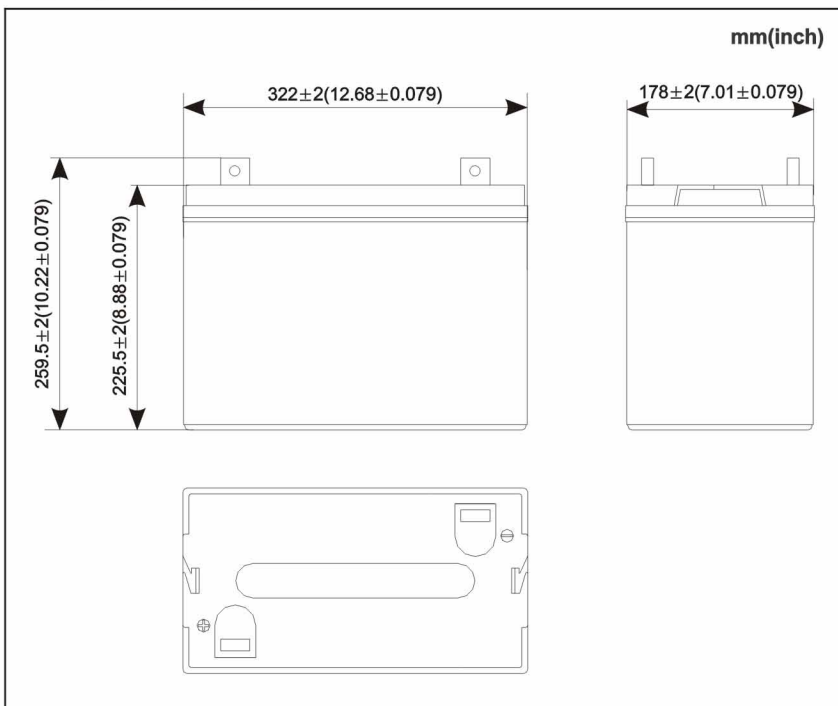

☆ Terminal

