




NON-SPILLABLE SEALED RECHARGEABLE BATTERY


# CBL121250FT

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25°C / 77 °F
● NOMINAL CAPACITY(10 hrs) : 125.0 Ah	10 hr @ 12.5 A : 125 Ah
● DIMENSIONS	5 hr @ 20 A : 100 Ah
TOTAL HEIGHT : 235 mm ( 9.25 inches )	3 hr @ 31.25 A : 93.75 Ah
CONTAINER HEIGHT : 235 mm ( 9.25 inches )	1 hr @ 75 A : 75 Ah
LENGTH : 417 mm ( 16.42 inches )	1 C @ 125 A : 62.5 Ah
WIDTH : 174 mm ( 6.85 inches )	● INTERNAL RESISTANCE( 25°C , 77 °F ) : 3 mΩ
WEIGHT : APPROX 45.5 kg ( 100.3 lbs )	● CHARGING VOLTAGE ( 25°C , 77 °F )
● MAX DISCHARGE CURRENT : 1000 A ( 5 sec )	STANDBY USE : 2.275±0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 2500 A( 0.3 sec )	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : RT-10	CYCLE USE : 2.45±0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
● DESIGN LIFE FOR STANDBY USE AT 20°C (68°F): 10 YEARS	● MAX CHARGING CURRENT : 37.5 A


Discharge Characteristics 25 °C ( 77 °F )

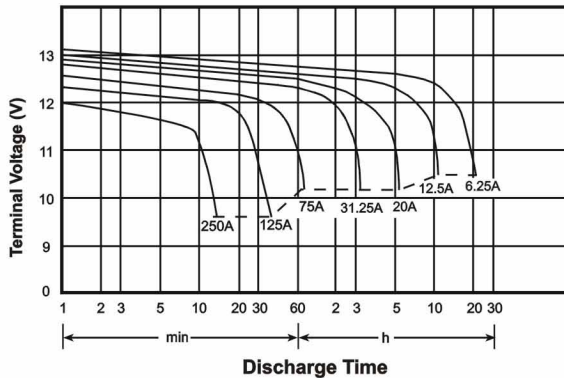

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

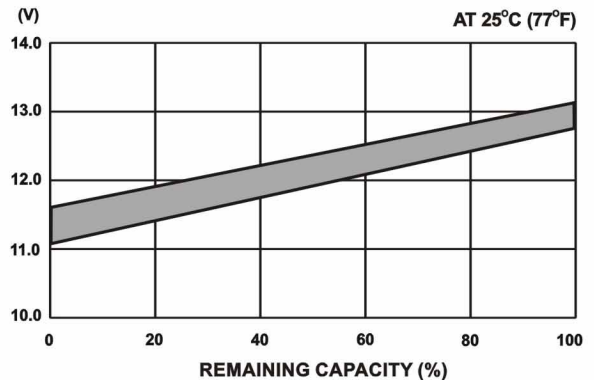

## ☆ Dimensions

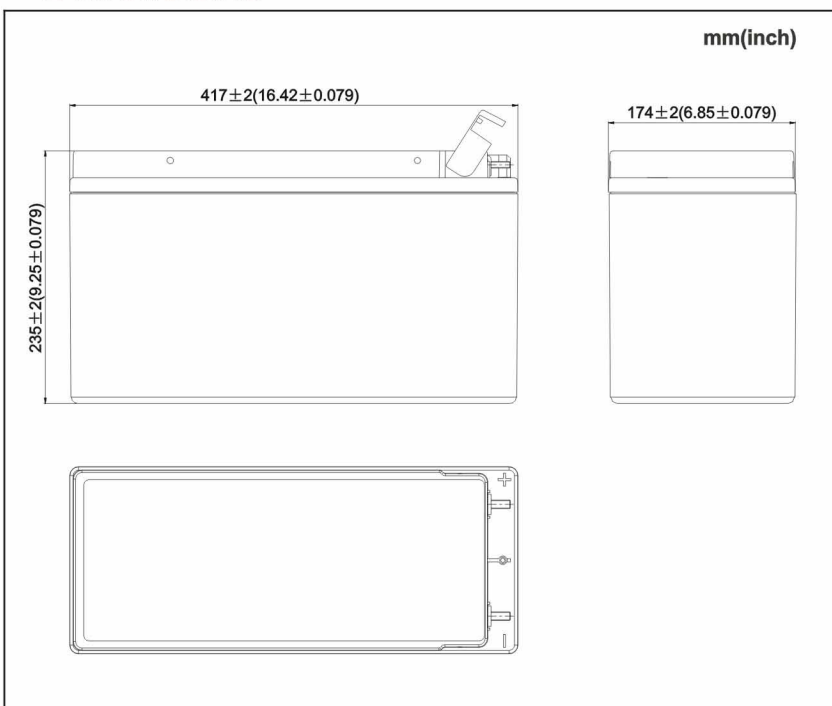

## ☆ Terminal

