




NON-SPILLABLE SEALED RECHARGEABLE BATTERY


# EV12130

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 13 Ah	20 hr @ 0.65 A : 13 Ah
● DIMENSIONS	10 hr @ 1.17 A : 11.7 Ah
TOTAL HEIGHT : 100 mm ( 3.94 inches )	5 hr @ 2.08 A : 10.4 Ah
CONTAINER HEIGHT : 94.5 mm ( 3.72 inches )	1 hr @ 7.8 A : 7.8 Ah
LENGTH : 151 mm ( 5.95 inches )	1 C @ 13 A : 6.5 Ah
WIDTH : 98 mm ( 3.86 inches )	● INTERNAL RESISTANCE( 25°C , 77 °F ) : 14 mΩ
WEIGHT : APPROX 4.20 kg ( 9.26 lbs )	● CHARGING VOLTAGE ( 25°C , 77 °F )
● MAX DISCHARGE CURRENT : 130 A ( 5 sec )	STANDBY USE : 2.275 0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 390 A( 0.1 sec )	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : FO-02/FO-03	CYCLE USE : 2.45 0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
	● MAX CHARGING CURRENT : 3.9 A


Discharge Characteristics 25 °C ( 77 °F )

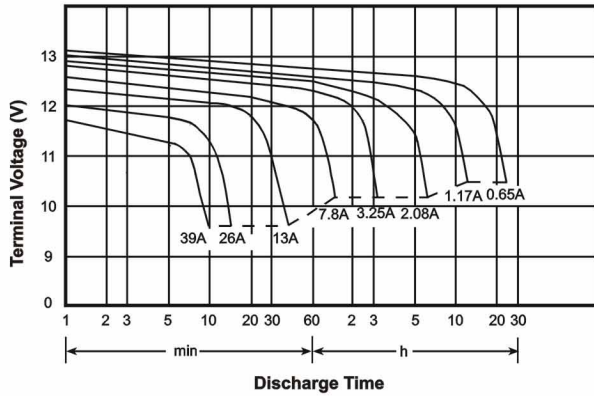

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

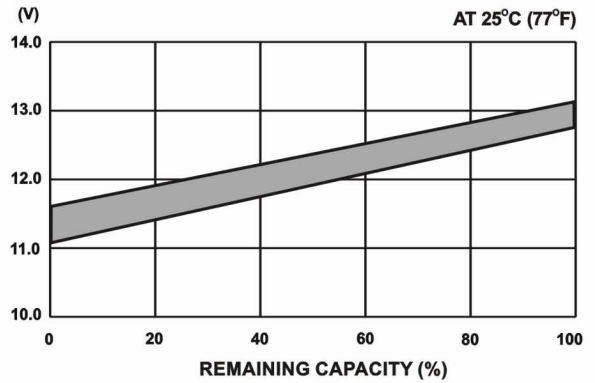

## ☆ Dimensions

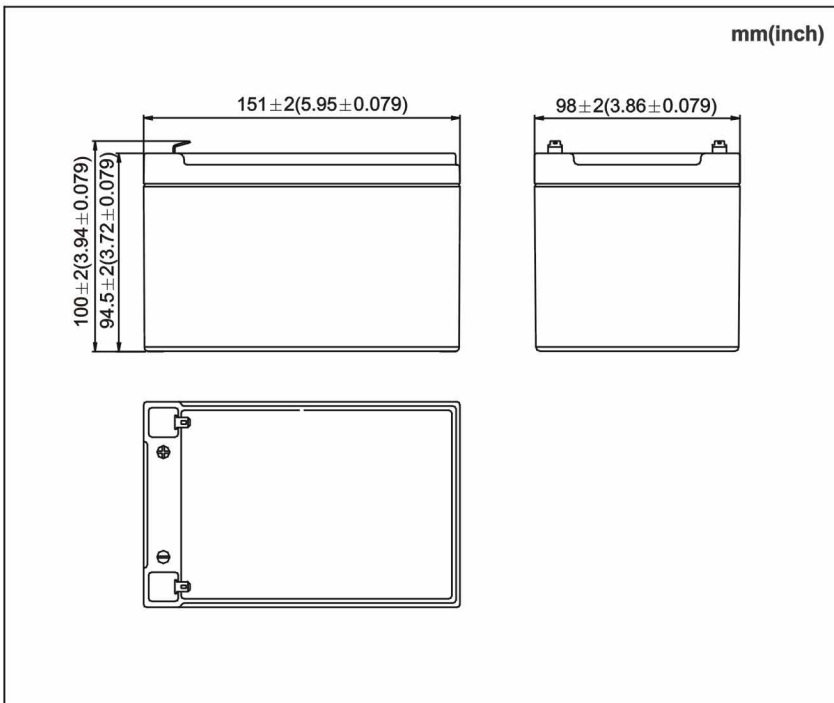

## ☆ Terminal

