




NON-SPILLABLE SEALED RECHARGEABLE BATTERY


# EV12260

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25°C / 77°F
● NOMINAL CAPACITY(20 hrs) : 26.0 Ah	20 hr @ 1.3 A : 26 Ah
● DIMENSIONS	10 hr @ 2.34 A : 23.4 Ah
TOTAL HEIGHT : 125 mm ( 4.92 inches )	5 hr @ 4.16 A : 20.8 Ah
CONTAINER HEIGHT : 125 mm ( 4.92 inches )	1 hr @ 15.6 A : 15.6 Ah
LENGTH : 166 mm ( 6.54 inches )	1 C @ 26 A : 13 Ah
WIDTH : 175 mm ( 6.89 inches )	● INTERNAL RESISTANCE( 25°C , 77 °F ) : 10 mΩ
WEIGHT : APPROX 9.98 kg ( 22.0 lbs )	● CHARGING VOLTAGE ( 25°C , 77 °F )
● MAX DISCHARGE CURRENT : 260 A ( 5 sec )	STANDBY USE : 2.275±0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 780 A( 0.1 sec )	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : RT-05	CYCLE USE : 2.45±0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
	● MAX CHARGING CURRENT : 7.8 A


Discharge Characteristics 25 °C ( 77 °F )

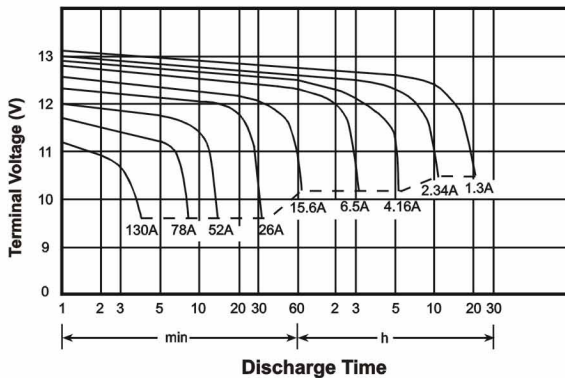

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

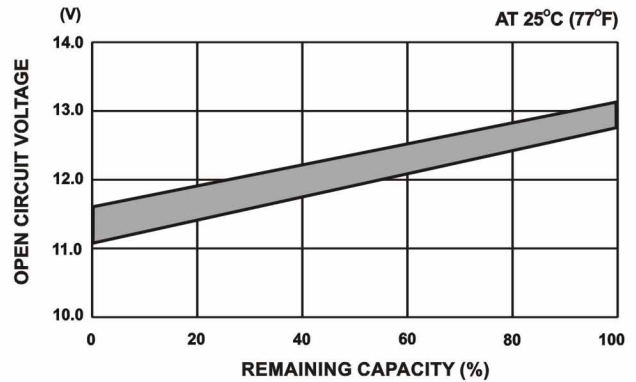

## ☆ Dimensions

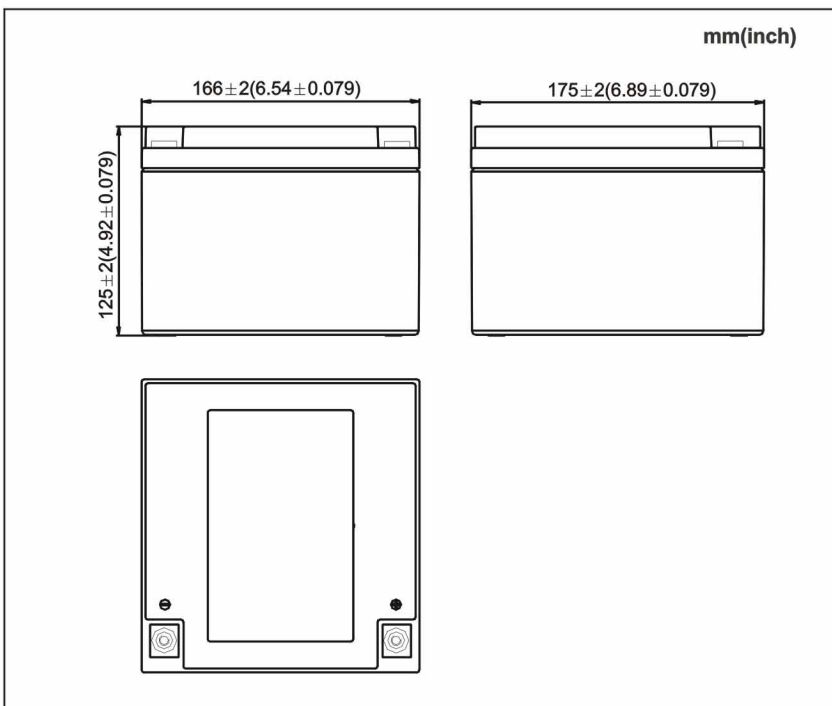

## ☆ Terminal

