




NON-SPILLABLE SEALED RECHARGEABLE BATTERY


12V, 10.0AH

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25°C / 77°F
● NOMINAL CAPACITY(20 hrs) : 10.0 Ah	20 hr @ 0.5 A : 10 Ah
● DIMENSIONS	10 hr @ 0.9 A : 9 Ah
TOTAL HEIGHT : 118 mm (4.65 inches)	5 hr @ 1.6 A : 8 Ah
CONTAINER HEIGHT : 112 mm (4.41 inches)	1 hr @ 6 A : 6 Ah
LENGTH : 151 mm (5.95 inches)	1 C @ 10 A : 5 Ah
WIDTH : 65 mm (2.56 inches)	● INTERNAL RESISTANCE(25°C , 77°F) : 23 mΩ
WEIGHT : APPROX 3.40 kg (7.50 lbs)	● CHARGING VOLTAGE (25°C , 77°F)
● MAX DISCHARGE CURRENT : 90 A (5 sec)	STANDBY USE : 2.275 0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 270 A(0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : FO-02/FO-03	CYCLE USE : 2.45 0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
	● MAX CHARGING CURRENT : 3.0 A

Discharge Characteristics 25°C (77°F)

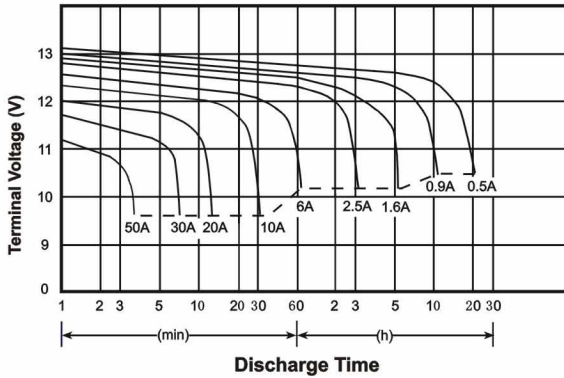


OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

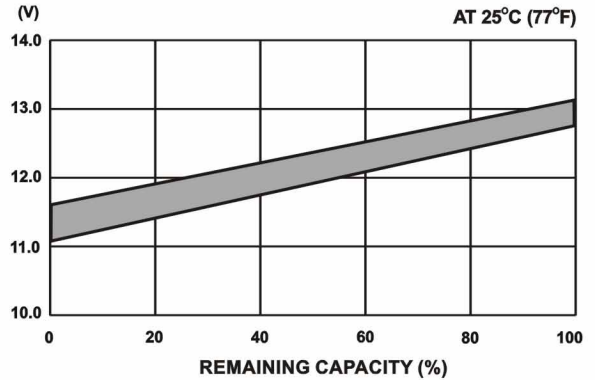

☆ Dimensions

65±2(2.56±0.079)

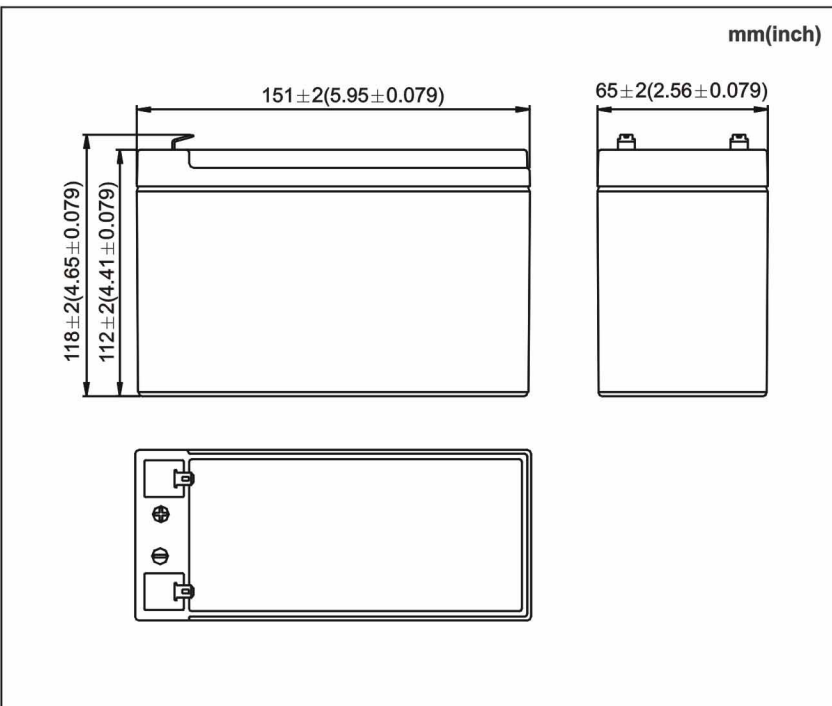

☆ Terminal

