




NON-SPILLABLE SEALED RECHARGEABLE BATTERY


GEL122000AAG 12V, 200Ah

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(10 hrs) : 200.0 Ah	10 hr @ 20 A : 200 Ah
● DIMENSIONS	5 hr @ 32 A : 160 Ah
TOTAL HEIGHT : 245 mm (9.65 inches)	3 hr @ 50 A : 150 Ah
CONTAINER HEIGHT : 218 mm (8.58 inches)	1 hr @ 120 A : 120 Ah
LENGTH : 518 mm (20.39 inches)	1 C @ 200 A : 100 Ah
WIDTH : 240 mm (9.45 inches)	● INTERNAL RESISTANCE(25°C , 77 °F) : 4.5 mΩ
WEIGHT : APPROX 64.10 kg (141.31 lbs)	● CHARGING VOLTAGE (25°C , 77 °F)
● MAX DISCHARGE CURRENT : 1600 A (5 sec)	STANDBY USE : 2.275 ± 0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 4000 A(0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : FP-30/RT-34	CYCLE USE : 2.45 ± 0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
	● MAX CHARGING CURRENT : 60 A


Discharge Characteristics 25 °C (77 °F)

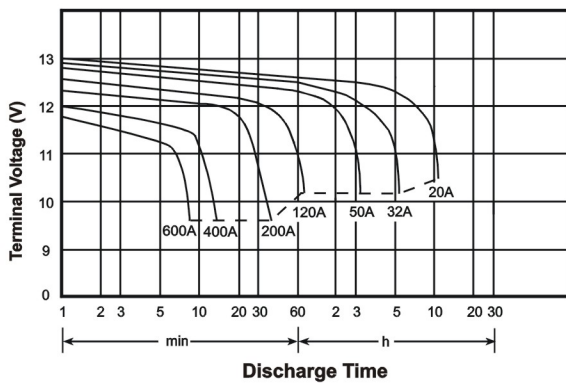

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

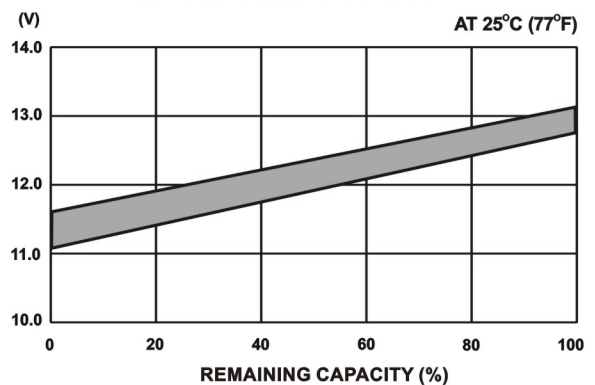

☆ Dimensions

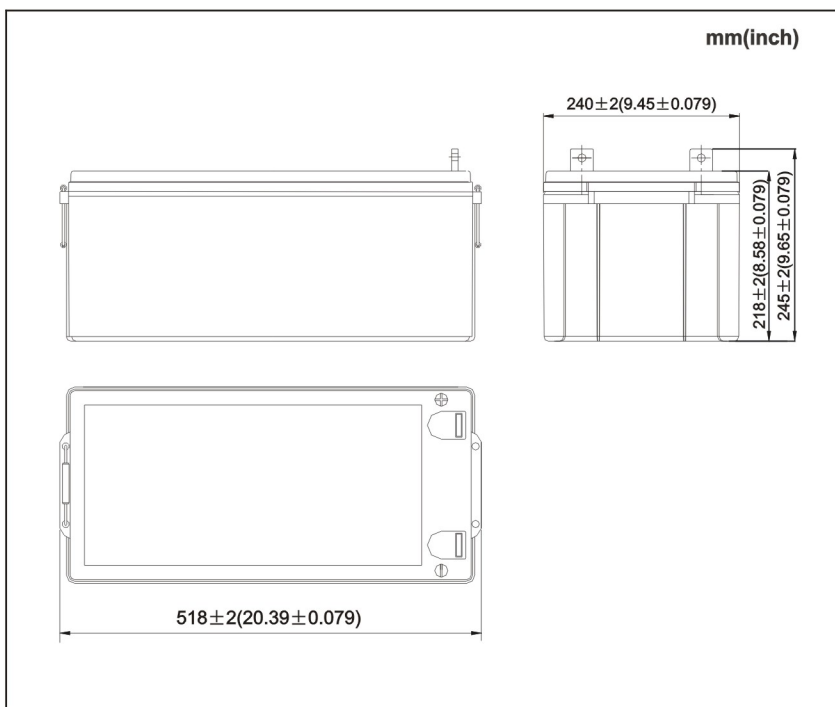

☆ Terminal

