
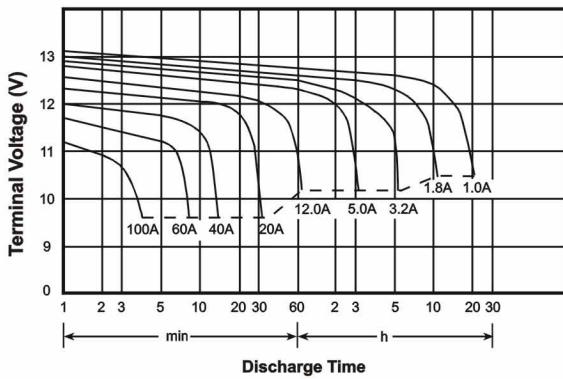
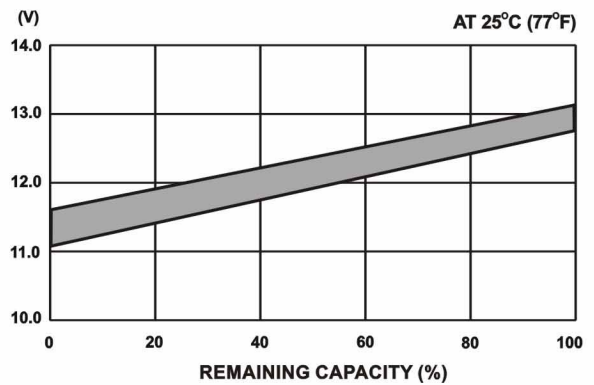


☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 20.0 Ah	20 hr @ 1.0 A : 20.0 Ah
● DIMENSIONS	10 hr @ 1.8 A : 18.0 Ah
TOTAL HEIGHT : 167 mm ( 6.58 inches )	5 hr @ 3.2 A : 16.0 Ah
CONTAINER HEIGHT : 167 mm ( 6.58 inches )	1 hr @ 12.0 A : 12.0 Ah
LENGTH : 181 mm ( 7.13 inches )	1 C @ 20.0 A : 10.0 Ah
WIDTH : 76.2 mm ( 3.0 inches )	● INTERNAL RESISTANCE( 25°C , 77 °F ) : 13 mΩ
WEIGHT : APPROX 6.35 kg ( 14.0 lbs )	● CHARGING VOLTAGE ( 25°C , 77 °F )
● MAX DISCHARGE CURRENT : 190 A ( 5 sec )	STANDBY USE : 2.275 ± 0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 500 A( 0.1 sec )	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : RT-08/FP-01	CYCLE USE : 2.45 ± 0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
: FLAME RETARDANT ABS	● MAX CHARGING CURRENT : 6.0 A

**Discharge Characteristics 25 °C ( 77 °F )**

**OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY**


## ☆ Dimensions

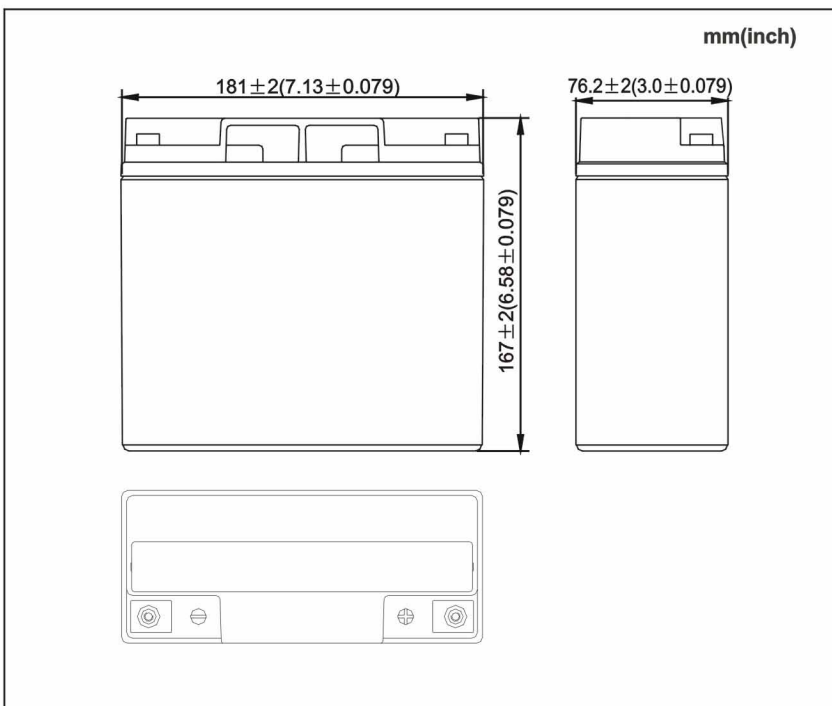

## ☆ Terminal

