


TYSONIC NI-MH Battery Data Sheet

Type A (Flat Top) 2200 mAh

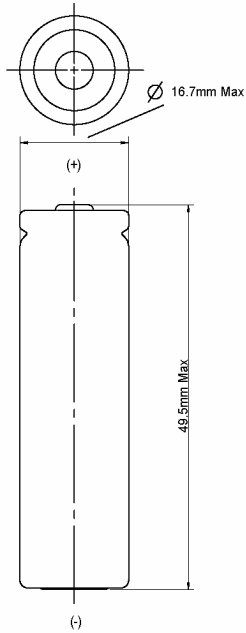


Dimensions (with Tube)

(mm)


Specifications

Nominal Voltage		1.2V/cell
Capacity	Typical	2200 mAh/0.2 CmA
	Minimum	2100 mAh/0.2 CmA
Charge	Standard	0.1 CmA for 16 hrs.
	Rapid	1.0 CmA for 1.2hrs.(approx.) (With- $\Delta V = 5\sim 10\text{mV/cell}$, Temp., Time charging control)
	Trickle	0.03 CmA (1 month)
Maximum Discharge Current		3.0 CmA
Discharge Cut-off Voltage		1.0 V/cell
Cycle Life (IEC 285)		500 cycles
Applicable Temperature	Standard Charge	0~+45°C
	Rapid Charge	0~+40°C
	Discharge	-10~+60°C
Storage	Within one year	-20°C ~+35°C
	Within 3 months	-20°C ~+45°C
	Within 1 month	-20°C ~+55°C
Relative Humidity Range		65%±20%
Dimension		D = 16.7 mm max. H = 49.5 mm max.
Weight		Approx. 40.0 g

Typical Charge Characteristics

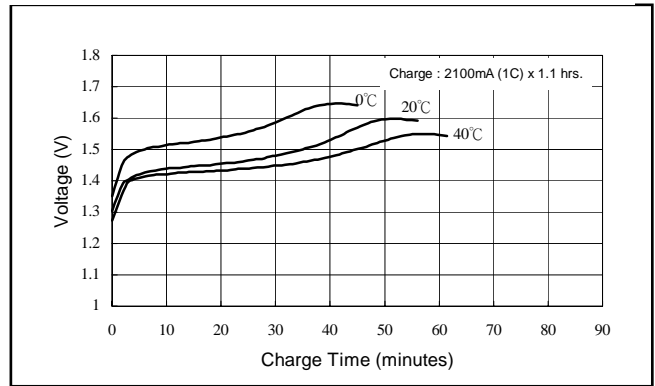

High Rate Discharge Characteristics

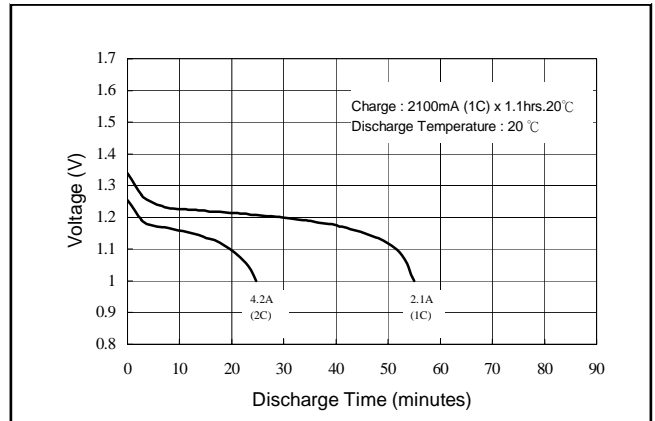

Standard Discharge Characteristics

