




NON-SPILLABLE SEALED RECHARGEABLE BATTERY


CBL121000FT

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(10 hrs) : 100.0 Ah	10 hr @ 10 A : 100 Ah
● DIMENSIONS	5 hr @ 16 A : 80 Ah
TOTAL HEIGHT : 227 mm (8.94 inches)	3 hr @ 25 A : 75 Ah
CONTAINER HEIGHT : 227 mm (8.94 inches)	1 hr @ 60 A : 60 Ah
LENGTH : 558 mm (21.97 inches)	1 C @ 100 A : 50 Ah
WIDTH : 125 mm (4.92 inches)	● INTERNAL RESISTANCE(25°C , 77 °F) : 4.0 mΩ
WEIGHT : APPROX 37.5 kg (82.7 lbs)	● CHARGING VOLTAGE (25°C , 77 °F)
● MAX DISCHARGE CURRENT : 800 A (5 sec)	STANDBY USE : 2.275±0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 2000 A(0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : RT-10	CYCLE USE : 2.45±0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
● DESIGN LIFE FOR STANDBY USE AT 20°C (68°F): 10 YEARS	● MAX CHARGING CURRENT : 30 A


Discharge Characteristics 25 °C (77 °F)

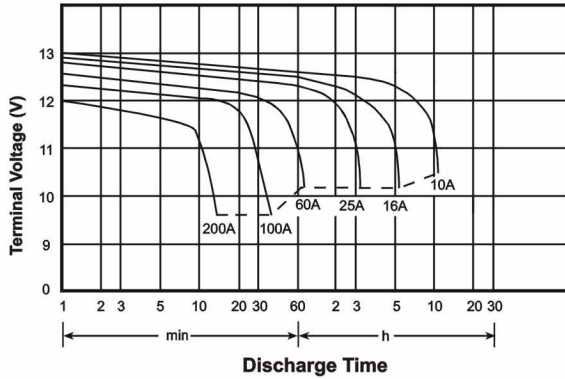

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

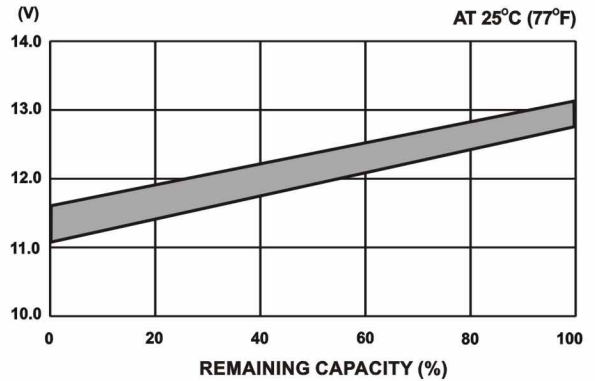

☆ Dimensions

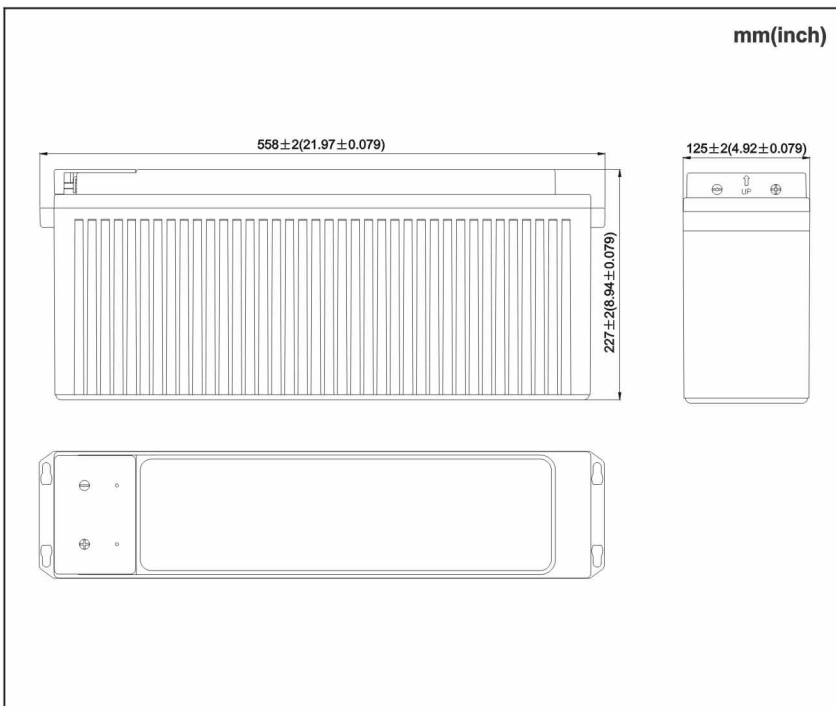

☆ Terminal

